



10,000psi 17H Dual Port (Type A) High pressure hydraulic hot stab

The dual port conforms to ISO 13628-8, but has larger internal fluid paths and integral sealing valves. The male has four check valves set inside the male body.

These are 0.2bar inflow, 2.5bar outflow (i.e., will not dump the ROV compensator pressure). These minimise ROV oil leakage and water ingress, and prevent underpressure in the hoses, etc.

The female receptacle has two screw-in cartridges that do the same, but are normally 0.2bar in/out. The female can be mounted by U-bolts around the body or flange; mounted by four bolts using a top-mounting interface plate.

Note: Flows up to 40lpm can be achieved, check valves are only rated to 30lpm so need to be removed from system to achieve high flow.

Applications

Subsea QD operations
Chemical & gas injection
Flooding & venting operations

Features

Industry standard
ISO 13628-8 Type A
Up to 30lpm / 7.9gpm
690bar / 10,000psi
Integral sealing valves
Pressure balanced

In the box


10,000psi 17H dual port (Type A)
Operational hoses
Operations and maintenance manual



10,000psi 17H Dual Port (Type A) Specifications



Working pressure	690bar / 10,000psi
Flow rate	30lpm / 7.92gpm
Hydraulic fluid and gases	690bar / 10,000psi
Weight	4.6kg / 10lbs
Port sizes	All ports 3/8" NPT
Flow path	8mm / 0.3in
Materials	Stainless steel UNS S31803

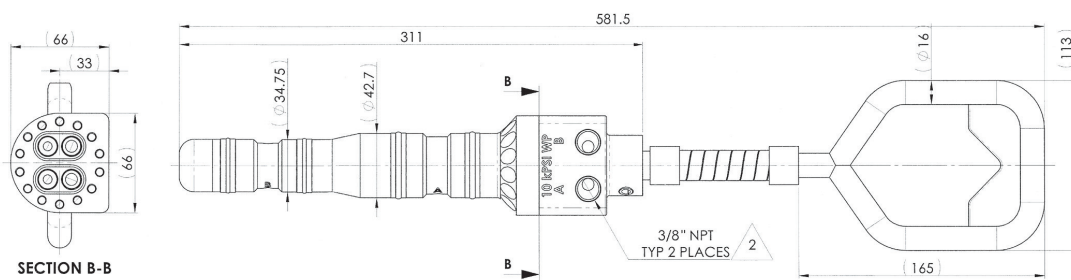

Aberdeen
+44 (0)1224 771888

Abu Dhabi
+971 2 650 7710

Houston
+1 281 398 9533

Singapore
+65 6545 9350