



3 Stage IHPU

Multi-fluid injection system

The 3 Stage IHPU can be used for numerous subsea applications including pressure testing, BOP operation, fluid transfer and hot stab operations with the capability for 3 selectable pressures each ranging from 0-5000psi and is designed to be easily and simply reconfigured, with the minimum of hassle.

Connection can be made to any sized fluid reservoir and operate using water / glycol and hydraulic mineral oils as suitable fluid media. The inbuilt depressurisation facility allows safe venting of pressure and pumping fluids back to reservoir avoiding any unwanted leakage to the subsea environment.

Applications


Pressure testing operations
Fluid transfer operations
Hot stab operations

Features

3 selectable pressures
Directional control
Suitable for mineral oils and glycols
350bar / 5076psi output
17lpm / 4.5gpm output

In the box

3 Stage IHPU
Test gauge
40ltr reservoir bag
Operational hoses
Operations & maintenance manual

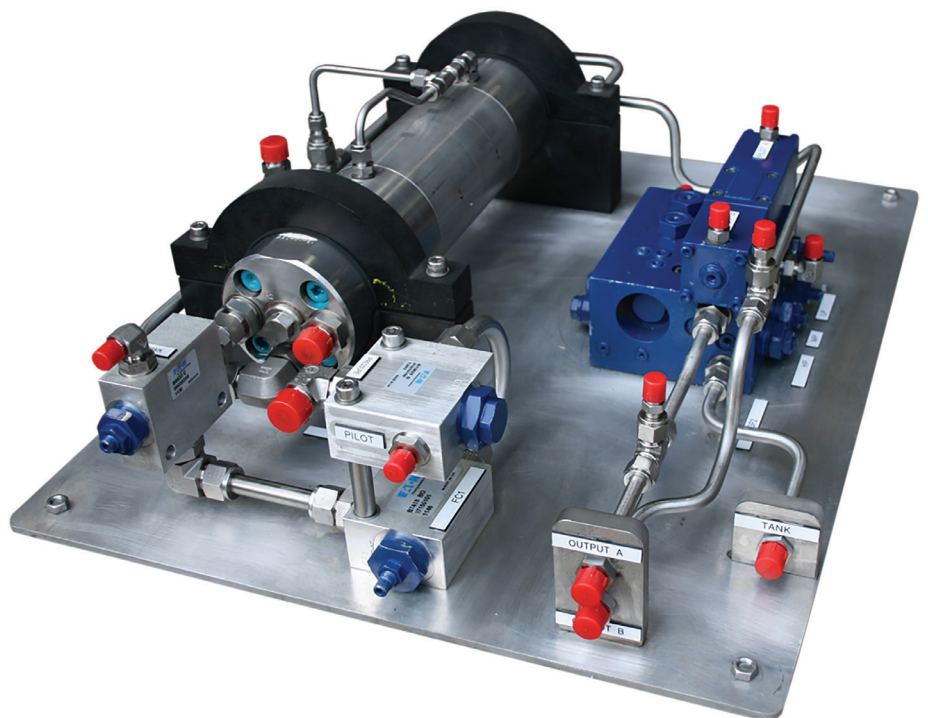

3 Stage IHPU

Specifications

Hydraulic input pressure	210bar / 3045psi
Hydraulic input flow	35lpm / 9.2gpm
Hydraulic output pressure	350bar / 5076psi
Hydraulic output flow	17lpm / 4.5gpm
Fluids	Seawater, glycol and mineral oils
Weight in air	58.3kg / 128.5lbs
Weight in water	48.4kg / 106.7lbs
Dimensions	650 x 465 x 185mm / 25.5 x 18.3 x 7.2in

