



## Manipulator Mounted Saw

Designed to mount on any manipulator wrist

Using a 14" tungsten carbide saw blade the manipulator mounted saw cuts through a multitude of materials with absolute ease and dexterity.

Specially designed to mount on the Schilling Rigmaster, using adaptor plates, the material to cut is simply grabbed with the manipulators jaws, held in place and cut.

Designed to fit to, rather than being held by the manipulator retains full function of the manipulators movements for further subsea tasks without limitation. Once a material is located in position the blade is switched on and fed towards the material, on completion of a cut the blade retreats within the saws body protecting it and the manipulator from entanglement or obstruction and allows the next target to be located in moments.

### Applications


- Anchor chain cutting
- Wire rope cutting
- Drill string cutting
- Steel pipe cutting
- Coflexip cutting

### Features

- Integrates with any manipulator

### In the box

- Manipulator saw
- Adaptor plate
- Tungsten carbide blade
- Control panel
- Operational hoses
- Operations and maintenance manual

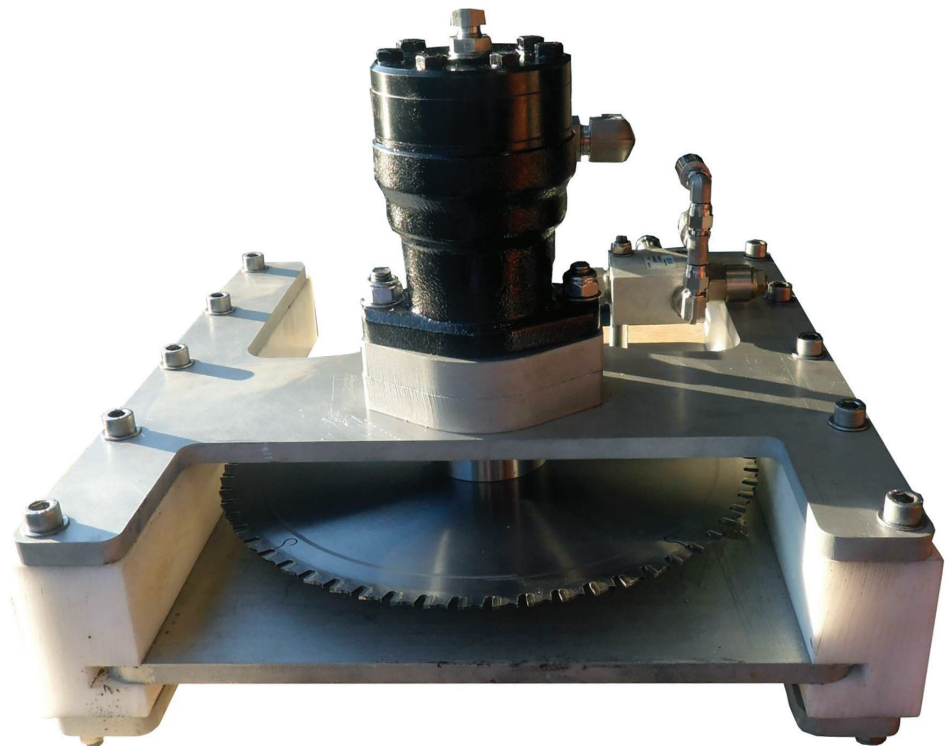


# Manipulator Mounted Saw

## Specifications



Hydraulic input pressure	140-210bar / 2030-3045psi
Flow	40lpm / 10.5gpm
Maximum cutting distance	93mm / 3.6in
Blade diameter	350mm / 13.7in
Maximum intermit speed	600rpm
Approx weight in air	32.1kg / 70.7lbs
Approx weight in water	22.4kg / 49.3lbs

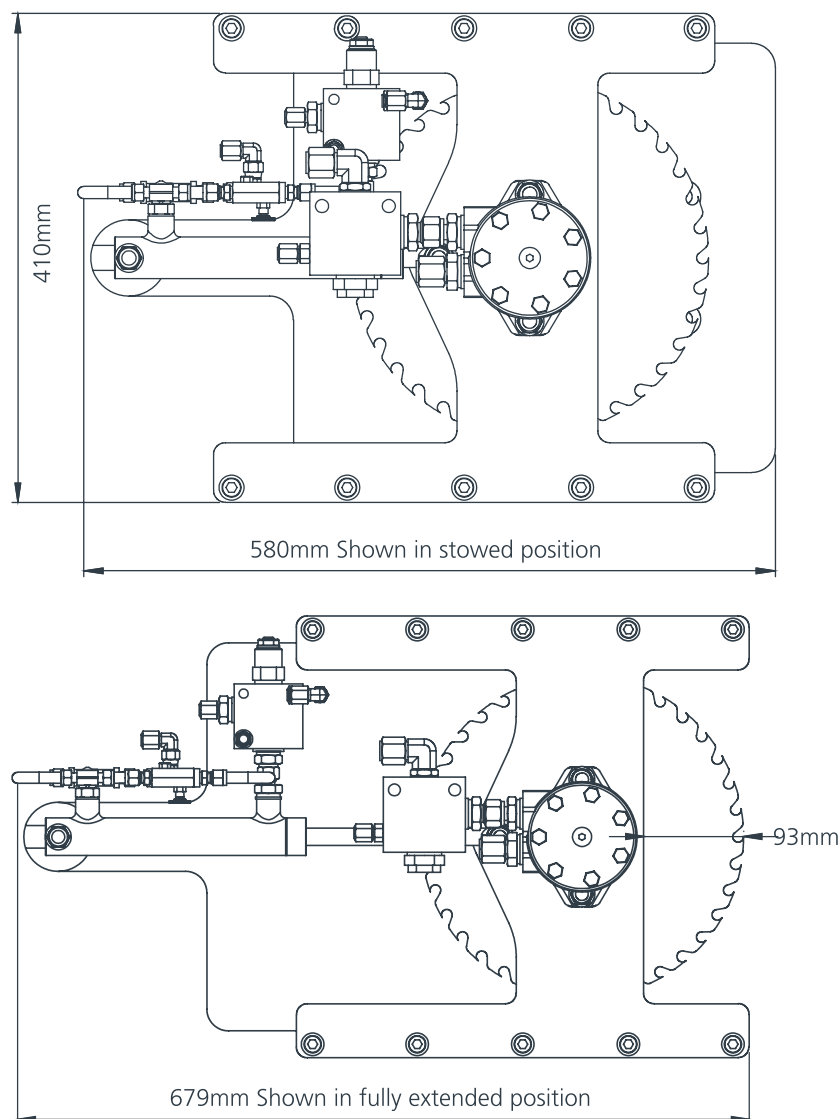

**Aberdeen**  
+44 (0)1224 771888

**Abu Dhabi**  
+971 2 650 7710

**Houston**  
+1 281 398 9533

**Singapore**  
+65 6545 9350