


Pipe End Prep Tool

Removes burrs and chamfers from pipelines

The pipe end prep tool removes burrs and chamfers from the inner and outer surfaces of a pipeline after it has been cut in preparation for installation of a subsea clamp. The preparation of the edges enables clamp seals to be installed safely and without being damaged. The removal of the internal burrs at the cut area also prevents damage to pigs deployed through the pipe. The tool requires low hydraulic flow enabling ROV operation.

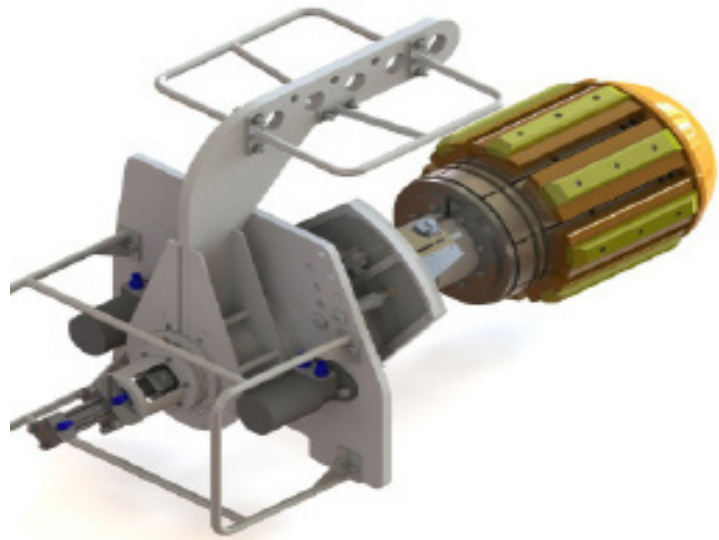

Technical Data

Pipe diameter	From 4 in to 30 in
Pipe wall thickness	From ¼ in to 2 in
Depth rating	10,000 fsw / 3,000 msw
Hydraulic flow requirement	3,000 psi, 5 gal/min