



Vortex Camera Winch

ROV mounted camera winch

The Vortex camera winch is designed to be mounted on an ROV to allow a camera to be deployed vertically down a hole for visual inspection. This is achieved through a lightweight subsea hydraulic winch combined with a 55m long cable. The camera mount is designed to support the subsea camera and gives additional weight which allows accurate deployment.

Applications


- Pipe inspection
- Vertical inspection
- Well head inspection

Features

- Lightweight and compact
- 55m cable length
- Plug & play

In the box

- Vortex Camera Winch
- Camera mount
- Spares package
- Operating instructions

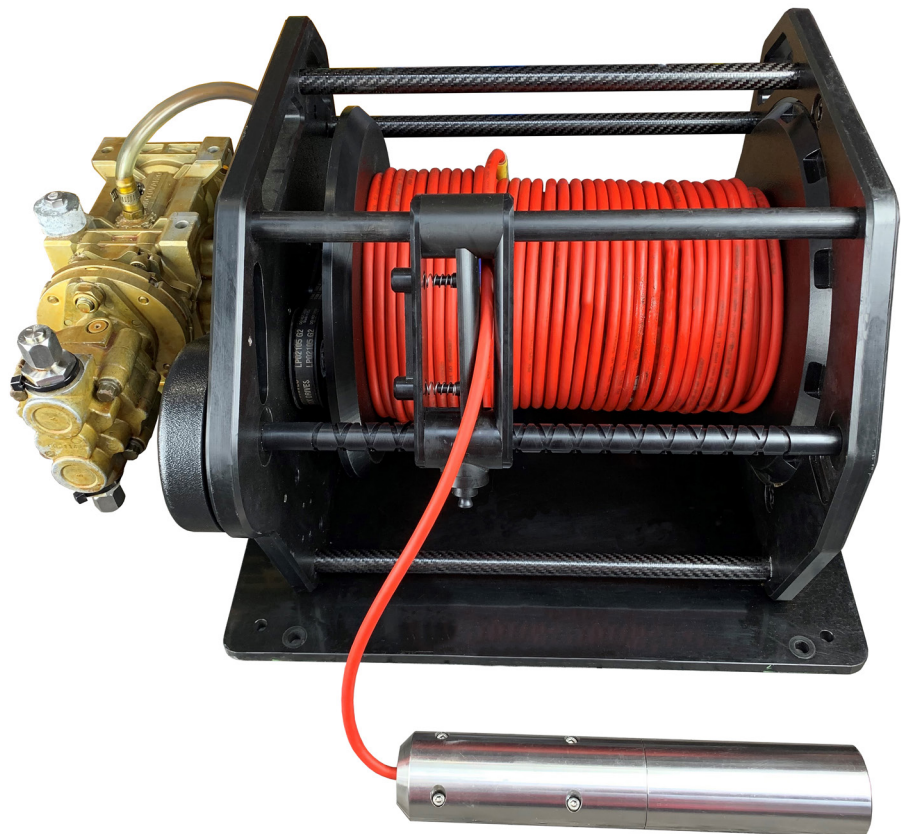

Vortex Camera Winch

Specifications



Flow rate requirement	16lpm / 4.2gpm to 30lpm / 7.8gpm recommended 20lpm / 5.3gpm
Pressure	103bar / 1500psi to 2017bar / 3000psi recommended 138bar / 2000psi
Weight in air	31kg / 68lbs
Weight in water	15kg / 33lbs
Camera	Imenco Silvertip Shark (not included)
Camera connector	Burton 55A1-1508-0000C