



## 0-520 Bar Jetting System

### High pressure water jetting system

The 0-520bar jetting system is widely recognised and used throughout world due to its reliability and impressive pumping capabilities; no other system offers the same power and reliability. The Integral relief valve is adjustable to provide any pressure range desired from 0.5-520bar.

The pump is suitable for connection to any subsea reservoir via the  $\frac{3}{4}$  suction port. The system is designed to be capable of pumping water, sea water, hydraulic oil or glycol. This highly versatile system can be used as either an IHPU or Jetting system making it an invaluable and effective tool for any ROV system.

#### Applications


Light subsea cleaning operations  
Pumping & injection operations

#### Features

Numerous nozzles available  
Mounted on ROV friendly plate  
PO check valve  
Flow control valve  
Integral relief valve (0.5-520bar)

#### In the box

0-520bar jetting system  
T bar nozzle handle  
Turbo nozzle  
Suction filter  
Basic spares kit  
Operational hoses  
Operations and maintenance manual

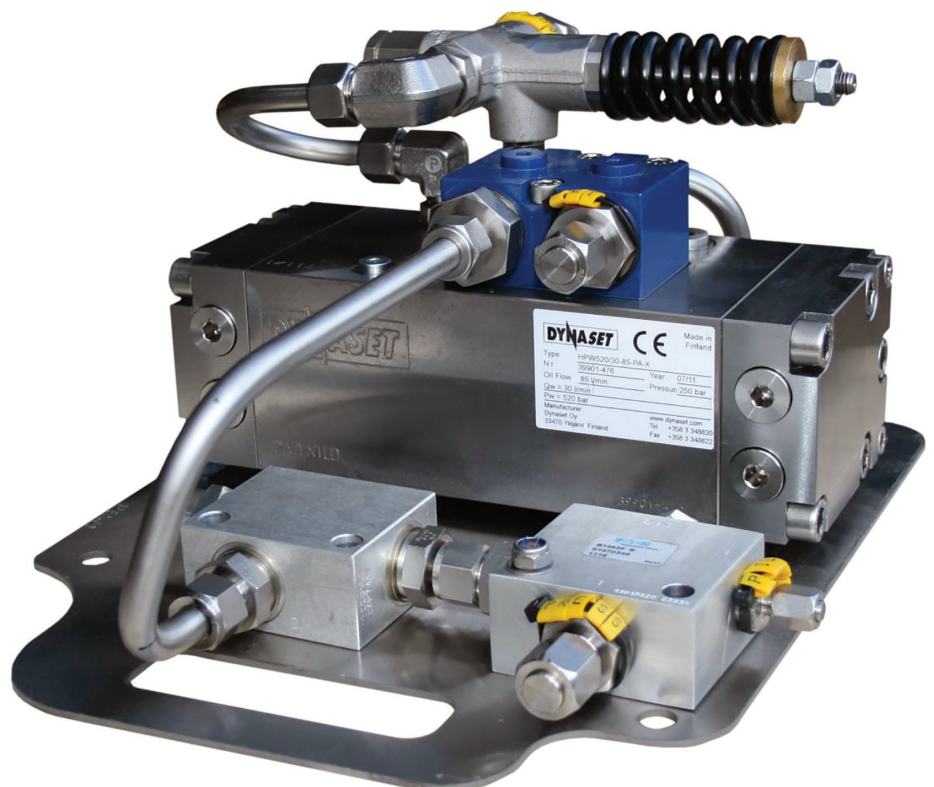

# 0-520 Bar Jetting System

## Specifications

Hydraulic input pressure	180-210bar / 2610-3045psi
Hydraulic input flow	30-60lpm / 8-16gpm
Hydraulic output pressure	0.5-520bar / 7.25-7500psi
Hydraulic output flow	15-30lpm / 4-8gpm
Maximum jetting	400bar / 5801psi (Standard nozzle)
Dimensions	431mm x 345mm x 233mm / 17 x 13.5 x 9.1in
Weight in air	27kg / 59.5lbs
Fluids	Water, sea water, hydraulic oil and glycol

